

PoE·Routr·AC 3 in1 Gateway


Model: DR-540GP

Description

YUNCORE® DR-540GP is a high-performance all-Gigabit gateway integrating triple functionality: Access Controller, Router, and PoE Power Sourcing. It enables centralized configuration and management of wireless APs, featuring 4× 48V PoE output ports. Supports remote and cloud-based management, tailored for SMB egress gateway requirements.

Features

- Dual-core high-performance CPU
- 512MB DDR3 memory
- Hardware watchdog enables automatic recovery from exceptions, minimizing maintenance
- 4× RJ45 PoE output ports (802.3at compliant, 30W max per port)

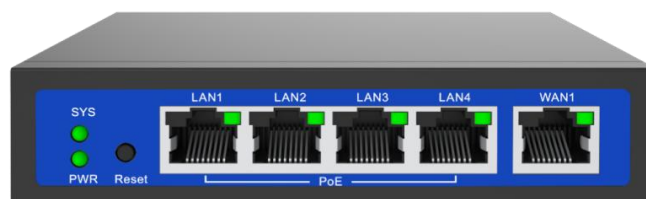

Specification	
Network Interfaces	WAN: 1 × 1GbE RJ45 port LAN: 4 × 1GbE RJ45 ports (48V PoE output)
PoE standard	IEEE 802.3af (15.4W) 、 IEEE 802.3at (30W)
Button	1× Reset button
LED	PWR LED: Solid on (power supplied) SYS LED: Blinking during normal operation 5× Link/Act LEDs (per port):Link Status: Solid green when connected; Activity: Blinking green during data transmission
Power	52V 1.2A, Total PoE Output: 54W (max)
Power consumption	< 8W (Non-PoE)
Dimensions (L×W×H)	122mm×90mm×27.3mm
Weight	0.28kg
Work Environment	Working Temperature: -10°C to 40°C; Storage Temperature: -40°C to 70°C; Humidity: 5% ~ 95% (Non-Condensing)