

## PoE·Routr·AC 3 in1 Gateway


Model: DR-980GP

### Description

YUNCORE® DR-980GP is a high-performance all-Gigabit gateway integrating triple functionality: Access Controller, Router, and PoE Power Sourcing. It enables centralized configuration and management of wireless APs, featuring 8× 48V PoE output ports. Supports remote and cloud-based management, tailored for SMB egress gateway requirements.

### Features

- Hardware watchdog support for system reliability
- 8× 10/100/1000Mbps RJ45 ports with standard PoE power delivery, supporting AP connectivity
- Built-in AC wireless controller for centralized management of up to 128 APs
- Hardware-based and software-based acceleration technologies

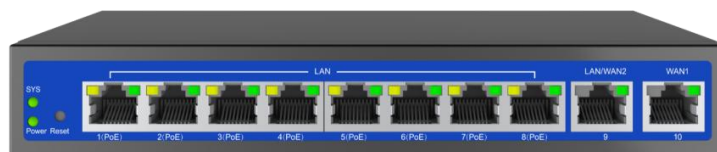

Specification	
Network Interfaces	WAN: 1 × 1GbE RJ45 port WAN/LAN: 1 × 1GbE RJ45 ports LAN: 8 × 1GbE RJ45 ports (48V PoE )
PoE standard	IEEE 802.3af (15.4W) 、 IEEE 802.3at (30W)
Button	1× Reset button
LED	PWR LED: Solid on (power supplied) SYS LED: Blinking during normal operation 8× PoE LEDs: Solid yellow: Connected to Powered Device (PD) 10 × Link/Act LEDs (per port):Link Status: Solid green when connected; Activity: Blinking green during data transmission
Power	52V 1.85A, Total PoE Output: 56W (max)
Power consumption	< 10W (Non-PoE)
Dimensions (L×W×H)	190mm*97.5mm*29.5mm
Weight	0.46kg
Work Environment	Working Temperature: -10°C to 40°C; Storage Temperature: -40°C to 70°C; Humidity: 5% ~ 95% (Non-Condensing)

