

**YUNCORE**


Specializing in Commercial Wireless Network Communication Solutions

Access Points / Wireless Bridges / Switches / Gateways



## 4+1+1-Port Full Gigabit Ethernet Unmanaged PoE Switch for Monitoring

SPC-5051-05G1GS-IA

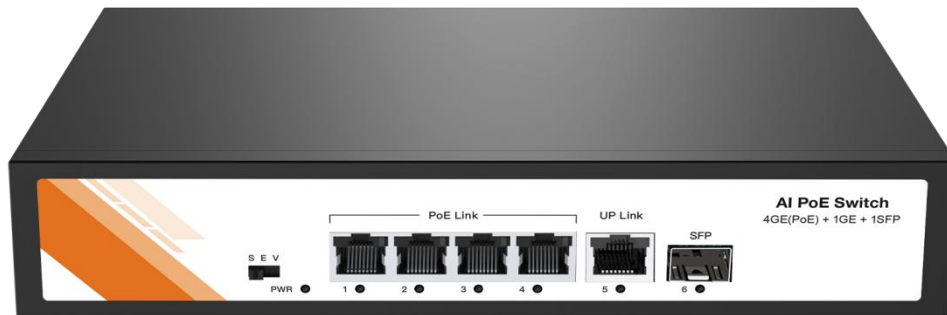

### Overview

The YUNCORE®SPC-5051-05G1GS-IA is a Gigabit Ethernet PoE switch designed specifically for monitoring environments, provide 4GE PoE power supply ports, 1GE RJ45 uplink port and 1GE SFP uplink port. It complies with IEEE 802.3af/at standards, automatically identifies powered devices, and ensures safe power delivery.

## Features

- Complies with IEEE 802.3af/at standards, automatically identifies powered devices (PDs), and delivers safe power supply
- Provides 4 × 10/100/1000Mbps PoE ports+1 × 10/100/1000Mbps RJ45 uplink port+1 × 1000Mbps SFP uplink port
- Total power: 45W; maximum output power per port: 30W
- Supports VLAN configuration, QoS, IGMP function
- Supports 250-meter network cable extension
- Supports surge protection
- Supports port short-circuit protection and overload protection
- Supports PoE port priority management
- Full metal casing with efficient heat dissipation
- Plug and play, zero configuration

## Specification

PoE Standard	IEEE 802.3 10BASE-T Ethernet; IEEE 802.3u 100BASE-TX Fast Ethernet; IEEE 802.3ab 1000BASE-TX Gigabit Ethernet; IEEE 802.3az (Half-Duplex, Full-Duplex);
Fixed Ports	4×10M/100/1000Mbps PoE ports with 52V PoE power supply, compliant with IEEE 802.3af/at, max. 30W per port; 1×10M/100/1000Mbps RJ45 uplink port; 1×1000Mbps SFP uplink port; 1×DIP Switch (S: Standard Mode    E: Extend Mode    V: VLAN Mode);
Fixed Port Attributes	Supports 10M/100M/1000Mbps transmission rates; Supports half-duplex, full-duplex, and auto-negotiation modes; Supports MDI/MDI-X auto-sensing;
PoE	Adaptive power output supports IEEE 802.3af (15.4W) and IEEE 802.3at (30W); Power pinout: 1/2+ 3/6-;
Exchange Mode	Store-and-forward mode

Packet Forwarding Rate	8.928Mpps
Backplane Bandwidth	12Gbps
MAC Address Table	Supports up to 2K MAC addresses; Supports automatic address learning and aging;
Indicator Lights	PWR (Power): Green light on when powered; Port: Green steady light when linked, flashing during activity;
Power Consumption	Total power consumption (without PoE load) < 3W
Power Supply	Input voltage: AC 100 ~ 240V; Maximum total output power: 52V/0.86A 45W;
Network Cable Type	10Base-T: Cat3, Cat4, Cat5 or above UTP (≤100m); 100Base-TX: Cat5 or above UTP (≤100m); 1000Base-T : Cat5e or above UTP/STP(≤100m);
Dimensions	220mm×162mm×43.2mm (bare unit)
Work Environment	Working temperature: -10°C to +55°C Storage temperature: -40°C to +70°C Humidity: 5% to 95% (no condensation)